
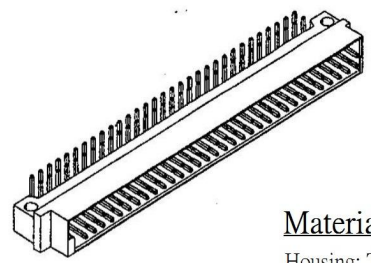


1 2 3 4 5 6 7 8

A

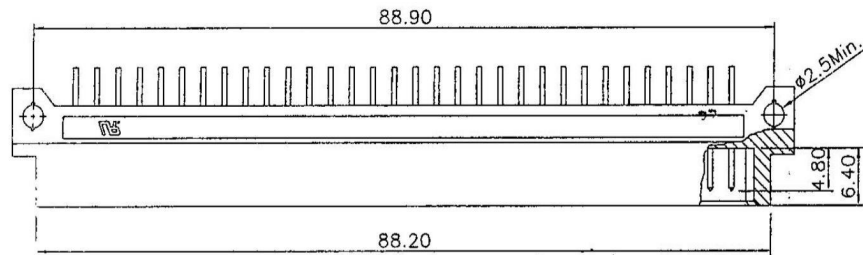



**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
Contacts: Copper Alloy.

B

C

D

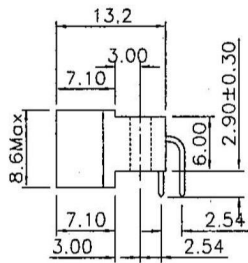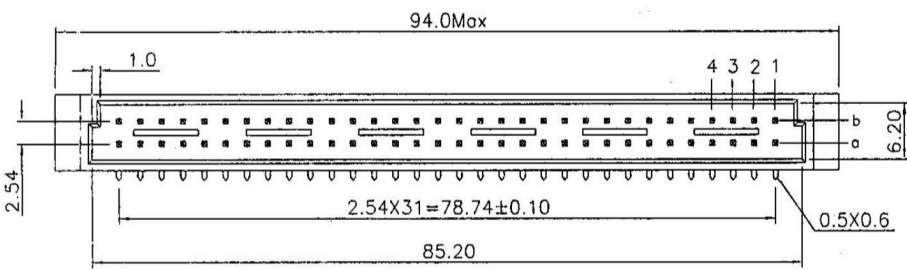


**Electrical Characteristics:**

Current Rating: 2 AMP.  
Dielectric Withstanding Voltage: AC 1000V for 1 minute.  
Insulator Resistance: 1000M $\Omega$  min. at DC 500V.  
Contact Resistance: 20m $\Omega$  max. at DC 100m A.  
Operating Temperature: -55°C ~ +125°C

E

F

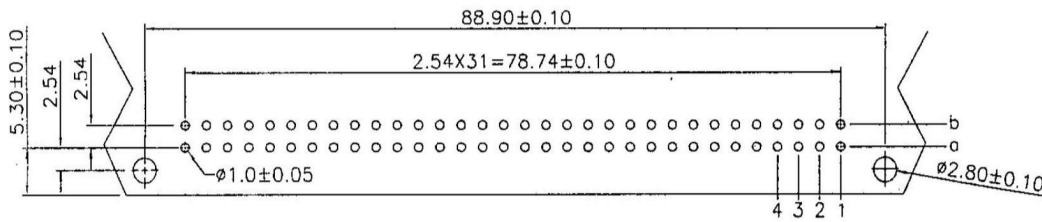

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	64	a b	

G

H

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 <b>BETTY</b>		TOLERANCE x = ±0.5 .x = ±0.25 .xx = ±0.15	PART NAME 品名 DIN41612 2.54mm DIP TYPE RIGHT ANGLE TYPE DUAL ROW BODY 64P SIZE-A+B 64P MALE SELECTIVE GOLD PLATING PIN L=2.9mm ROHS
DWG. 製圖 <b>BETTY</b>	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 C4162-64MCARS0R
DATE 制表日 2011/03/08	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4	REV. 次 A

1 2 3 4 5 6 7 8