


REVISIONS			
NO.	DATE	DESCRIPTION	APPROVE

Mechanical

1. Spring Force: 113 grams @ 4.4mm
2. Recommend Travel: 4.4mm
3. Full Travel: 6.6mm
4. Mechanical Life: 200K
5. Operating Temp: -50°C ~ 150°C

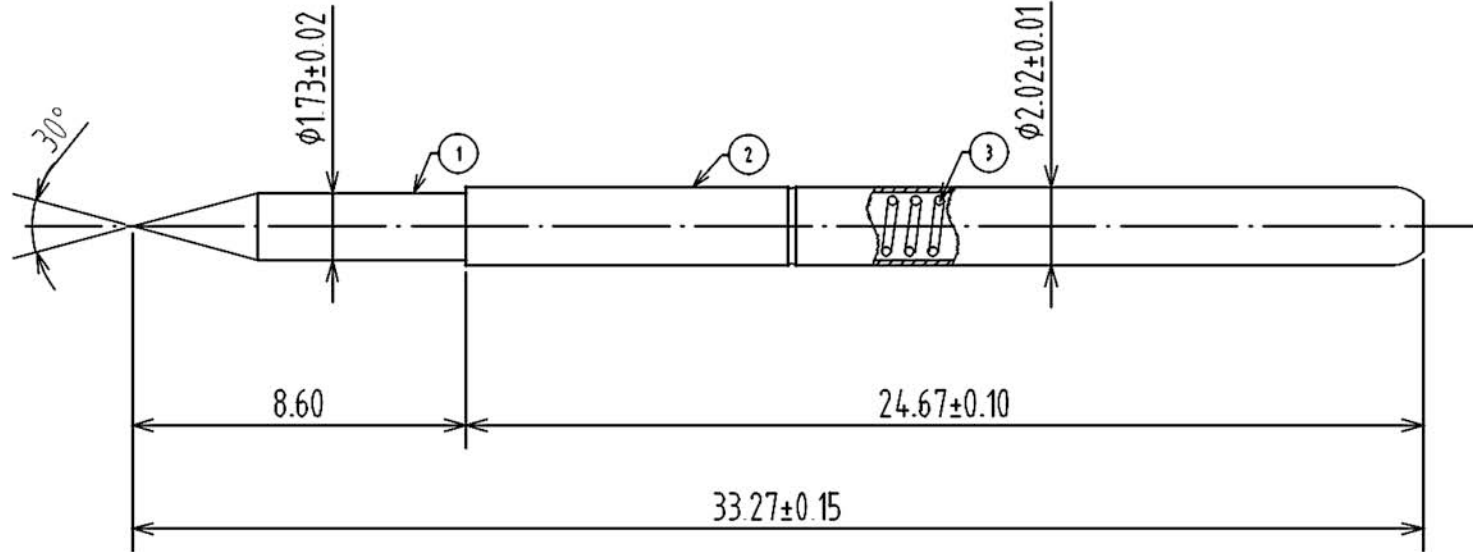

Electrical Characteristics

1. Current Capacity: 5A Continuous
2. DC Resistance: $100\text{m}\Omega$ (AVG)

NO.	PRODUCT	MATERIAL	PLATING	HARDNESS	REMARK	TOLERANCE	Unit	Scale	Spring Force(±20%)	Part Name
5						DECIMALS	mm	60:1	Maximum	ITSP3-B
4						X.X ±0.1			6.6(mm)	
3	SPRING	SUS	-			X.XX ±0.05	Date	2016/05/13	Maximum	(gf)
2	BARREL	N/S	Au/Ni			X.XXX ±0.02	Drawn	Max	Work Stroke	4.4(mm)
1	PLUNGER	BeCu	Au/Ni	400Hv		ANGLES	Design	Max	Work Stroke	113(gf)
						0 ±3°	Approved	Cherry	Initial	(gf)
						0.0 ±1°				