

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical



Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

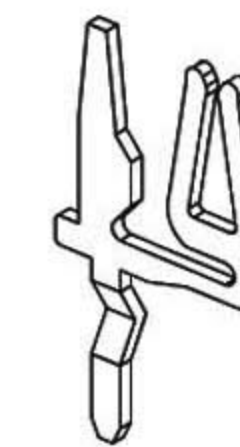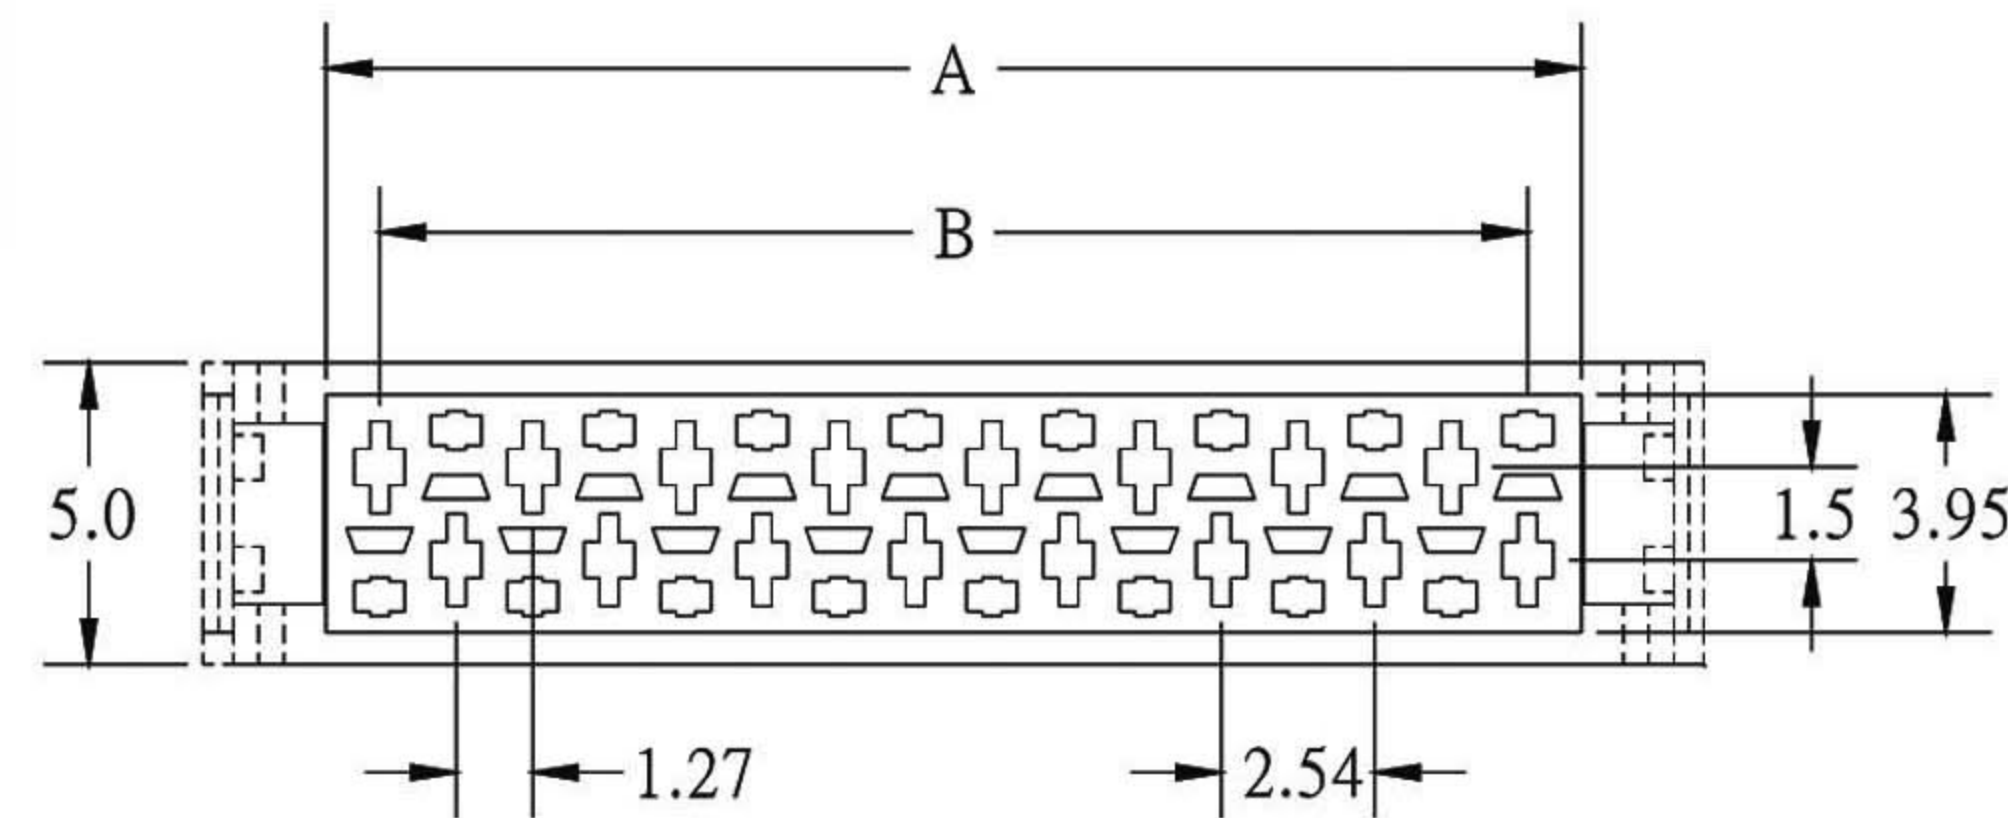

| POSITION | A | B | C | D |
|----------|-------|-------|-------|-------|
| 4 | 5.59 | 3.81 | 9.66 | 6.98 |
| 6 | 8.13 | 6.35 | 12.20 | 9.52 |
| 8 | 10.67 | 8.89 | 14.74 | 12.06 |
| 10 | 13.21 | 11.43 | 17.28 | 14.60 |
| 12 | 15.75 | 13.97 | 19.82 | 17.14 |
| 14 | 18.29 | 16.51 | 22.36 | 19.68 |
| 16 | 20.83 | 19.05 | 24.90 | 22.22 |
| 18 | 23.37 | 21.59 | 27.44 | 24.76 |
| 20 | 25.91 | 24.13 | 29.98 | 27.30 |
| 22 | 28.45 | 26.67 | 32.52 | 29.84 |
| 24 | 30.99 | 29.21 | 35.06 | 32.38 |
| 26 | 33.53 | 31.75 | 37.60 | 34.92 |

