


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/05/06'		LJC 07/05/06'
B	P/N CODE CHANGE	JLZ 03/03/15'		

Female Terminal



T-DS1068-02 - X C X 0 0 (B)

Terminal Plating  
6: Tin  
8: Full gold flash

Terminal type  
S: Female Terminal  
P: Male Terminal


NOTES:

1. SPECIFICATIONS


- . Housing material: NYLON 66
- . Wire range: AWG#28~#22
- . Rated voltage: 250V
- . Rated current: 3A
- . Contact resistance:  $\leq 0.03\Omega$
- . Insulation resistance:  $\geq 1000M\Omega$
- . Withstanding voltage: 500V,AC 1 minute
- . Temperature range: -25 ~ +85°C
- . Recommend PC board thickness:1.6mm

2. PRODUCT NUMBER CODE:


Male Terminal



Female Housing

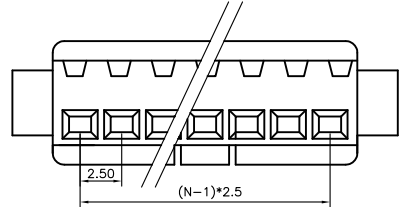

Male Housing

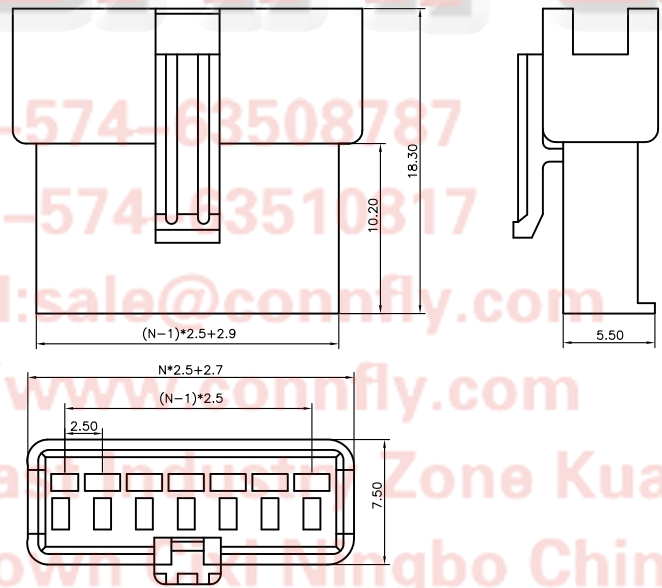

I-DS1068-02 - X C X 0 X (B)

No.of Housing  
02~12

Housing Color  
W: White  
T: Transparent  
B: Black

Housing type  
S: Female Housing  
P: Male Housing

N=No.of contact

Tel:86-574-63508787  
Fax:86-574-63510317  
Email:sale@connfly.com  
http://www.connfly.com  
Add:East China Zone KuangYan  
Town Ningbo China  
P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	P.C.B CONNECTOR 2.5mm SM TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1068-02 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>		
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1068-02-XXXXX					