



## AMASS

(Item No): AM-1009L

(Drawing)

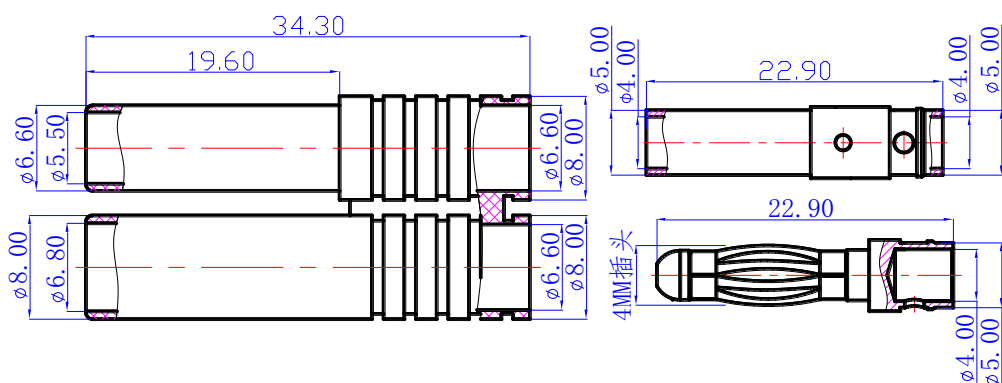

### ■ (Material & Parameter)

Item No.	AM-1009L	CR	0.65mΩ
COLOR			DC 500V
Metal Material	Brass Gold Plated	RC	32A
Plastic Material	PA	MC	70A
FR LEVEL	UL94 V0	USE TIMES	1000 TIMES
Recommend USE	BATTERY/ CONTROLLER	Cable SPEC.	12AWG
CERTIFICATION	---	TEMPERATURE	-20℃ to 120℃

★ (Data sheet will change according with the test background)