


REVISIONS			
NO.	DATE	DESCRIPTION	APPROVE

Mechanical

1. Mechanical Life: 200K
2. Operating Temp: -50°C ~ 150°C

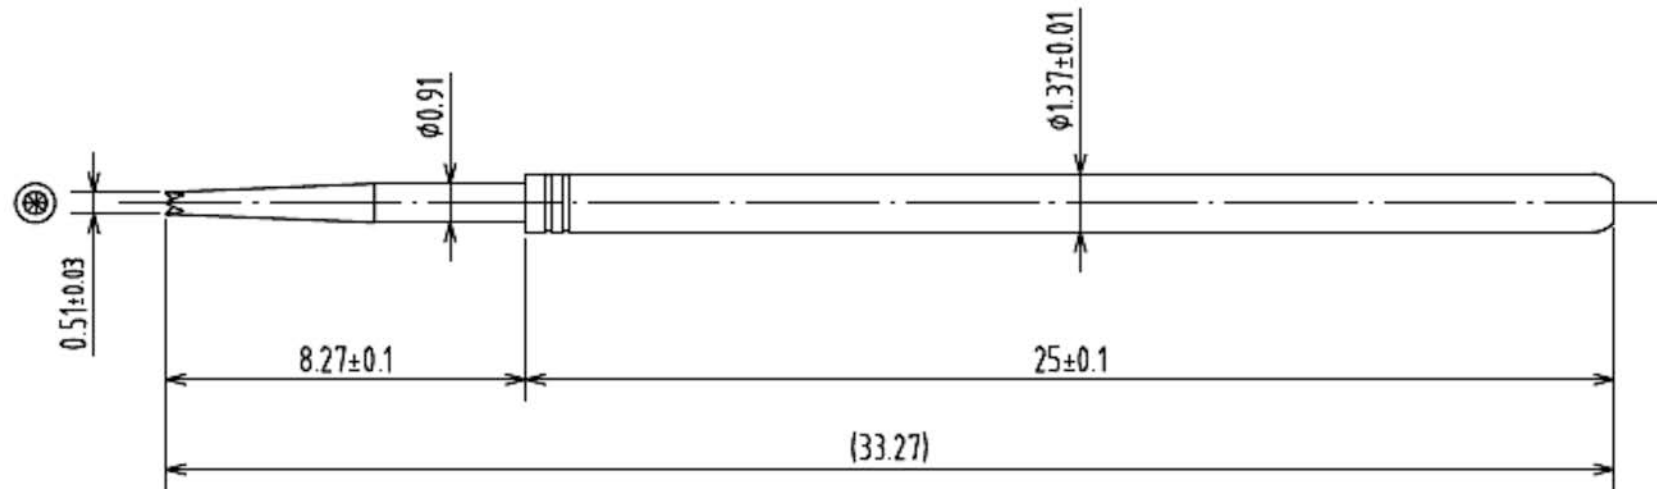

Electrical Characteristics

1. Current Capacity: 5A
2. DC Resistance: $< 100 \text{ m}\Omega$

NO.	PRODUCT	MATERIAL	PLATING	HARDNESS	REMARK	TOLERANCE DECIMALS	mm	20:1	Spring Force[±20%]	IT100-Q	
5											
4											
3	SPRING	SUS	-			0~6 ±0.05mm		2019/09/25	Maximum	6.40(mm)	
2	BARREL	PhBr	Au/Ni			>6~30 ±0.1mm			Maximum	(gf)	
1	PLUNGER	SK4	Au/Ni	600Hv		>30~120 ±0.15mm			Max	Work.Stroke	4.0(mm)
						ANGLES			Max	Work.Stroke	200(gf)
						0 ±3°			Cherry	Initial	(gf)
						0.0 ±1°					



A/0