
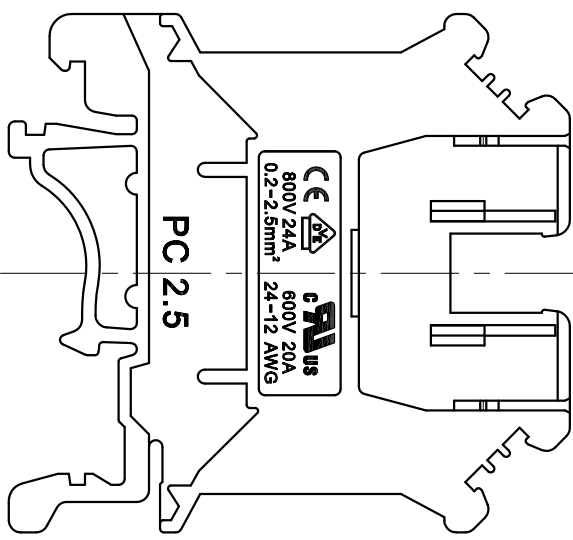



42.5

46.0

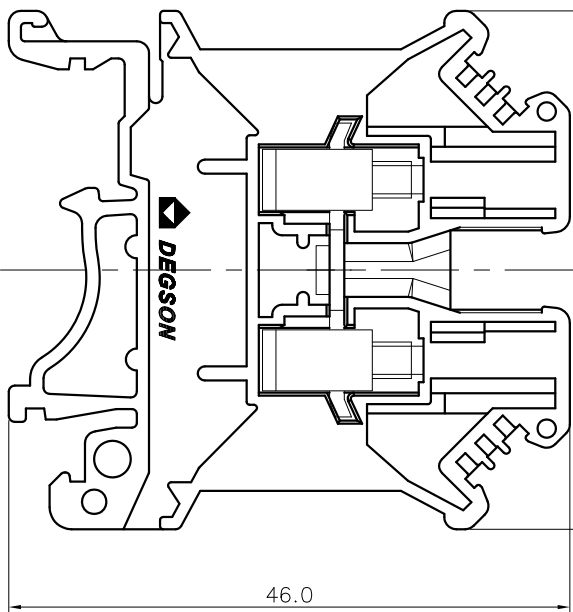

PC2.5 - 01P - 1Y - 00A (H)
 (RoHS)
 00A - (Standard)
 (Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)
 2. (Blue)
 3. (Black)
 4. (Green)
 5. (Orange)
 6. (Red)
 7. (Transparent)
 8. (Yellow)
 9. (White)

NOTES1:

- 1. UL Standard
- 1. Rated voltage/current : 600V / 20A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Torque value : M3 , 4.43Lb.in
- 4. Wire range : 24~12AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	800V
Rate current(A)	24A

- 2. Torque value : M3 , 0.5N·m
- 3. Wire range : 0.2~2.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.2mm, Poles : N=01P
- 3. Stripping length : 7~8mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch Range	In		Nominal Dimension		Range		D
	mm	In	mm	In	mm	In	
6	Over	10	Over	30	Over	100	Over
	To	10	To	30	To	100	To
10	Over	24	Over	60	Over	150	Over
	To	24	To	60	To	150	To
±0.15 ±0.20 ±0.30 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30 ±Z							

6. RoHS Compliance

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	PC2.5-01P-1Y-00A(H)
CHKD:	/	CUSTOMER DRAWING	REV
DFT:	/	DRAWING NO.:	SHEET
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
			1:1

A 8 7 6 5 4 3 2 1